


Pyrolyzer Unit (for GD-81D Series) **PLU-80 SPECIFICATION**

Model	PLU-80
Power supply indication	POWER lamp lit (green)
Power supply cable	Cable 1.25 mm ² (AGW16), 2 core
Power supply	24 V DC \pm 10 %
Power consumption	Max. 25 W
Tube connecting port	Rc1/4 (with half union <PP> for PTFE tube O.D.6 \times I.D.4 mm (1/4 \times 1/8 in) / (1/4 \times 3/16 in))
Operating temperature range	0 °C to +40 °C (32 °F to 104 °F) (no sudden changes)
Operating humidity range	30 to 80 %RH (no condensation)
Mounting type	Wall-mounting type
Dimensions (excluding projections)	Approx. 70 (W) \times 120 (H) \times 145 (D) mm (Approx. 2.76 \times 4.72 \times 5.71 in)
Weight	Approx. 0.9 kg (Approx. 1.98 lb)
Color	Main unit: Gray, Front door: White

Outline Drawings

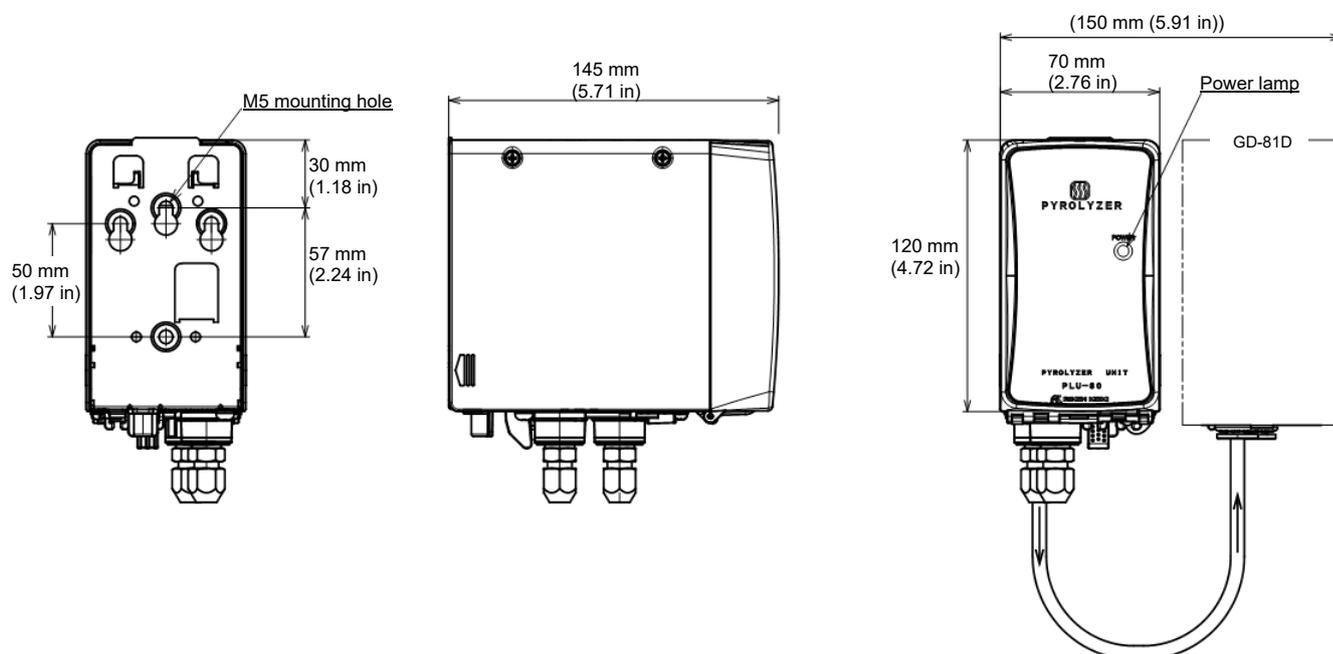

Terminal Drawings

